

Tubelight

BCXSY



The Tubelight by BCXSY redefines traditional fluorescent lights and bends the rules of lighting, literally. This suspended design arrives fully assembled, for easy installation. Tubelight is available in two variants, with a 1.5-meter fixed LED tube or 5-meter flexible LED tube. The 1.5-meter version boasts a fixed arc. With the 5-meter version, you can shape the flexible tube as desired. Drape it over the sleek black fixture or fix it to the ceiling or wall with the clamping holders. You can position the tube to your liking. With the dim-to-warm functionality, you enjoy complete control over colour temperature and light intensity for your desired ambiance.

Detailing



Illuminate any space with the versatile Tubelight—perfect for offices, homes, and commercial settings.


Colours



Tubelight

Tubelight / 150

Dimensions

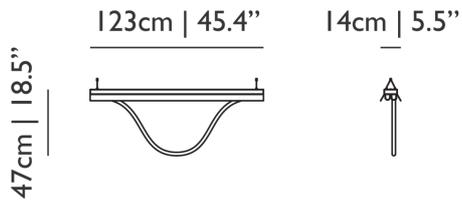

Product

WIDTH 123cm | 48.4"
HEIGHT 47cm | 18.5"
DEPTH 15cm | 5.9"
WEIGHT NETTO 6.7kg | 14.77lbs

Packaging

WIDTH 36cm | 14.2"
HEIGHT 21cm | 8.3"
CUBAGE 0.11m³ | 4ft³
LENGTH 150cm | 59.1"

Technical CE

MATERIAL

Powdercoated metal base with silicone LED tubes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

2

INPUT VOLTAGE

220-240V

FREQUENCY

50/60

MAX POWER CONSUMPTION

33W

LIFETIME

50000 hours

CABLE COLOUR

Black

CABLE LENGTH

250cm | 98.4"

SWITCH

No

CANOPY

Matching steel cylinder

CHROM X

0.326123

CHROM Y

0.337708

COLOUR TEMPERATURE

2900 K

CRI

94

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1416 lm

R9

81

DIMMING & LIGHTING CONTROL

Push / Pulse dim on Line Voltage, Wireless Wall Switch,
Mains / ELV dimming is not possible, Dim to Warm

See last page for more information about the dimming possibilities.



*Technical UL***MATERIAL**

Powdercoated metal base with silicone LED tubes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

2

INPUT VOLTAGE

120-277V

FREQUENCY

50/60

MAX POWER CONSUMPTION

33W

LIFETIME

50000 hours

CABLE COLOUR

Black

CABLE LENGTH

250cm | 98.4"

SWITCH

No

CANOPY

Matching steel cylinder

CHROM X

0.326123

CHROM Y

0.337708

COLOUR TEMPERATURE

2900 K

CRI

94

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1416 lm

R9

81

DIMMING & LIGHTING CONTROL


Push / Pulse dim on Line Voltage, Wireless Wall Switch,
Mains / ELV dimming is not possible, Dim to Warm

See last page for more information about the dimming possibilities.



Tubelight / 500

Dimensions

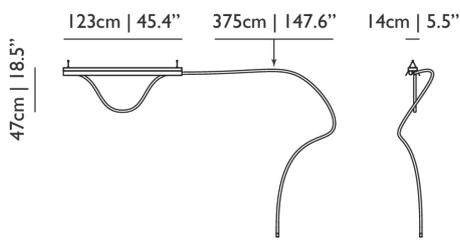

Product

WIDTH 123cm | 48.4"
HEIGHT 8cm | 3.1"
DEPTH 15cm | 5.9"
WEIGHT NETTO 8.5kg | 18.74lbs

Packaging

WIDTH 56cm | 22"
HEIGHT 26cm | 10.2"
CUBAGE 0.2m³ | 6.94ft³
LENGTH 135cm | 53.1"

Technical CE

MATERIAL

Powdercoated metal base with silicone LED tubes

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

220-240V

MAX POWER CONSUMPTION

63W

CABLE COLOUR

Black

SWITCH

No

CHROM X

0.326123

COLOUR TEMPERATURE

2900 K

LIGHT DIRECTION

All directions

R9

81

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

2

FREQUENCY

50/60

LIFETIME

50000 hours

CABLE LENGTH

250cm | 98.4"

CANOPY

Matching steel cylinder

CHROM Y

0.337708

CRI

94

LIGHT OUTPUT

3636 lm

DIMMING & LIGHTING CONTROL

Push / Pulse dim on Line Voltage, Wireless Wall Switch,
Mains / ELV dimming is not possible, Dim to Warm

See last page for more information about the dimming possibilities.



*Technical UL***MATERIAL**

Powdercoated metal base with silicone LED tubes

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

2

INPUT VOLTAGE

120/277V

FREQUENCY

50/60

MAX POWER CONSUMPTION

63W

LIFETIME

50000 hours

CABLE COLOUR

Black

CABLE LENGTH

250cm | 98.4"

SWITCH

No

CANOPY

Matching steel cylinder

CHROM X

0.326123

CHROM Y

0.337708

COLOUR TEMPERATURE

2900 K

CRI

94

LIGHT DIRECTION

All directions

LIGHT OUTPUT

3636 lm

R9

81

DIMMING & LIGHTING CONTROL

Push / Pulse dim on Line Voltage, Wireless Wall Switch,
Mains / ELV dimming is not possible, Dim to Warm

See last page for more information about the dimming possibilities.



Dimming & Lighting Control

Push / Pulse dim on Line Voltage

The luminaire is dimmable by using an external momentary switch or pushbutton switch. The switch is usually mounted on an existing wall socket. In some cases a Phase or Control wire needs to be added to your home's wiring. The switch should be suitable for use with line voltage and of the type 'normal off - momentary on'. The luminaire dims perfectly when the switch makes and holds contact. A short press switches between on and off.

Compatible models: 150 CCC, 150 CE, 150 UL, 500 CCC, 500 CE, 500 UL

Wireless Wall Switch

With our Wireless Wall Switch, you'll have full control over your Moooli lighting design with one touch. Our Wireless Wall Switch comprises two components, a wall switch and radio device to put in the canopy of your Moooli lighting design. The wall switch can be integrated in System 55 or Decora style wall switches. The Wireless Wall Switch communicates via Bluetooth with the radio device in the luminaires canopy. Within moments you can enjoy full and fluent dimming, all the way to dark.

Compatible models: 150 CCC, 150 CE, 150 UL, 500 CCC, 500 CE, 500 UL

Mains / ELV dimming is not possible

Mains and/or ELV dimming is not possible. The wireless wall switch is advised for dimming in this case.

Compatible models: 150 CCC, 150 CE, 150 UL, 500 CCC, 500 CE, 500 UL

Dim to Warm

3000k - 2100k Dim to Warm

Compatible models: 150 CCC, 150 CE, 150 UL, 500 CCC, 500 CE, 500 UL
